

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number  
WO 2004/049663 A1

(51) International Patent Classification<sup>7</sup>: H04L 27/233, 25/03, G01S 5/14

(21) International Application Number:  
PCT/CA2002/001843

(22) International Filing Date:  
27 November 2002 (27.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): RE-  
SEARCH IN MOTION LIMITED [CA/CA]; 295 Phillip  
Street, Waterloo, Ontario N2L 3W8 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): NIELSEN, Jorgen, S.  
[CA/CA]; 827 Edgemont Road, Calgary, Alberta T3A 2J1  
(CA).

(74) Agents: PATHIYAL, Krishna, K. et al.; Research In Mo-  
tion Limited, 295 Phillip Street, Waterloo, Ontario N2L  
3W8 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PI, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii)) for the following designations AE,  
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES,  
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG.

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR APPLYING VITERBI TYPE PSK DEMODULATION FOR OPTIMUM CORRELA-  
TION OF GPS SIGNALS

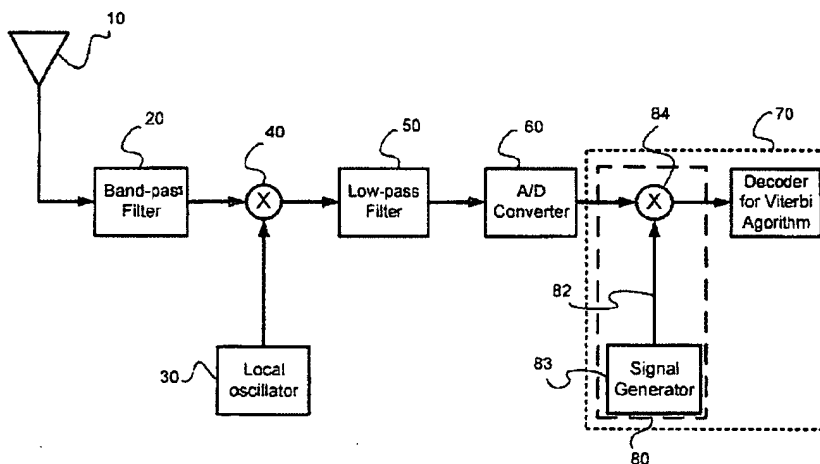

(57) Abstract: A method and system of improving sensitivity in the demodulation of a received signal over an arbitrary measurement time epoch, the method comprising the steps of: correlating the received signal in a coherent fashion (80); and utilizing a Viterbi phase state keying trellis demodulation with a variable resolution of phase states over 360° to demodulate the radio frequency phase trajectory of the signal throughout the measurement time epoch (70); and the system comprising a receiver for receiving a direct sequence spread spectrum signal, the receiver comprising: an antenna (10) for receiving the direct sequence spread spectrum signal; a downconverter (40) for downconverting the received signal, producing a downconverted signal; an analog to digital converter (60) to convert the downconverted signal to a digital signal; a despreader (80) for despreading and coherently correlating the digital signal to a known signal, creating a despread signal; and a processor (70) for applying a Viterbi algorithm to the despread signal.



UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

10/534735  
JC06 Rec'd PTO 12 MAY 2003

5/p145

## Method and System for applying Viterbi type PSK Demodulation for Optimum Correlation of GPS Signals

### Field of the Invention

5       The present invention relates to a method and system for increasing the sensitivity of the demodulation of direct-sequence spread spectrum modulated-signals and more particularly to the application of a Viterbi demodulation type algorithm to the output of a coherent correlation of a GPS C/A L1 signal to improve the demodulation sensitivity.

10

### Background to the Invention

Due to Federal Communications Commission (FCC) requirements for identifying mobile phone location, vendors are beginning to incorporate global positioning system (GPS) receivers into their handsets. This is an assisted form of  
15 GPS where the host base station provides key search parameter information to the handset such that the GPS satellite search and subsequent delay measurement becomes significantly less computationally extensive for the handset. In the code-division multiple access (CDMA) context, the messaging between the base station and the handset to support the assisted GPS (AGPS) is documented in "Position  
20 Determination Service Standards for Dual Mode Spread Spectrum Systems," TIA/EIA/IS-801-1, published by the Telecommunications Industry Association (TIA).

In order for mobile location to be successfully based on AGPS, it is necessary that the GPS receiver in the handset unit have significantly higher sensitivity than is nominally required in a typical stand alone GPS unit. The reason is that the handset  
25 unit is usually oriented in positions or in locations that are not favorable for GPS signal reception. Hence a signal to noise ratio (SNR) sensitivity target is typically around 17 dB-Hz. Given that the GPS Coarse/Acquisition (C/A) L1 band which is typically used for mobile position location has a bandwidth of about 2 MHz, this implies that the input raw GPS, prior to processing, is more than 40 dB below the  
30 thermal noise floor.

There is also a significant push to drive the cost of the overall handset down which limits the quantity of the processing which can be done on the received GPS signals to extract them from the noise. This also limits the quality of the various radio frequency (RF) oscillator components used in the handset's receiver.  
35 Consequently, it can be expected that there will be some additional local oscillator

(LO) noise that needs to be compensated for. Notably, there is no closed automatic frequency correction (AFC) loop possible during the GPS measurement as the input SNR is too low. The lack of AFC, and the use of low cost, low power, RF LO components, implies that there will inevitably be a significant finite offset, drift, and some instability associated with the LO down conversion frequency.

The C/A signal from a GPS SV (space vehicle) is a DS-SS (direct sequence spread spectrum) with a chip rate of 1.023 Mcps. It is modulated as binary phase shift keying (BPSK) on a 1.574 GHz carrier. The GPS receiver correlates the received signal with a locally generated DS-SS code signal. In the AGPS scheme, traditional DS-SS correlation is also done. However, detailed information regarding the doppler shift of the SV GPS signal and code offset is available from the host base station (BS) which significantly reduces the search and detection effort. Nevertheless, the mobile GPS receiver is still required to determine the code delay and doppler to a finer resolution than that available from the host BS such that mobile location is possible.

Based on standard assumptions regarding the noise in the GPS signal channel, the optimum receiver would correlate the signal in a coherent fashion over an integration time period that is sufficiently long to provide about 11 dB SNR at the correlator output. This will typically provide an adequate probability of detection with a reasonable false alarm rate. However, in the case of a mobile GPS receiver, due to the instability of the RF LO and the uncertainty of the SV doppler, the coherent integration epoch needs to be limited. Also valid GPS readings are still required even if the user does not hold the receiver steady. Hence, typically the coherent integration time is limited to 10 msec or less. As the available coherent integration epoch is not sufficient to obtain the sensitivity required, non-coherent summations of sequential coherent correlation integration outputs are used. However, non-coherent processing is a very inefficient means of further enhancing the SNR of a signal as it discards certain known statistical aspects of the signal.

### Summary of the Invention

The method and system of the present invention overcome the above by providing a way to demodulate the residual RF phase trajectory of a DS-SS dispreading and correlation, using quasi-coherent integration for a measurement epoch of arbitrary duration. The receiver in the present invention downconverts an incoming signal using a local oscillator. The receiver then despreads the signal.

In a perfect system the output from the despreader would be a DC signal. However, due to frequency and phase instabilities in the radio frequency local oscillator, and due to uncertainty of the GPS SV doppler, the phase trajectory is generally a time varying phasor.

5 In order to provide increased sensitivity, a trellis is created with a fixed number of phase states evenly distributed between zero and 360°. The state transitions in the trellis are limited based on known phase slew rate limitations. Probabilities for these state transitions are similarly based on these same factors.

A Viterbi algorithm is then applied to the phase of the despread signal.  
10 Likelihood metrics are created for each path based on the phase of the despread signal as well as path probabilities. The system and method then uses the Viterbi algorithm to find the highest likelihood path for the phase trajectory through the trellis.

The present invention therefore provides a method of improving sensitivity in the demodulation of a received signal over an arbitrary measurement time epoch,  
15 said method comprising the steps of: correlating said received signal in a coherent fashion; and utilizing a Viterbi phase state keying trellis demodulation with a variable resolution of phase states over 0 to 360° to demodulate the radio frequency phase trajectory of said signal throughout the measurement time epoch.

The present invention further provides a method of increasing sensitivity of a  
20 receiver for direct-sequence spread spectrum signals, said method comprising the steps of: downconverting the direct-sequence spread spectrum signal; despread the downconverted signal creating a despread signal with a radio frequency phase trajectory; and applying a Viterbi algorithm to the despread signal to determine the radio frequency phase trajectory, whereby the algorithm has the steps of: defining a  
25 number of possible states, each state corresponding with a discrete phase and all the states together creating an even distribution of phases between zero and 360°; creating possible state transitions from each state; setting the probability of a given state transition occurring; defining a trellis with paths based on the possible state transitions at a number of discrete time intervals; taking a sample of the despread  
30 signal at a number of discrete time intervals; creating a likelihood metric for each path based on the phase trajectory of the despread signal at the time interval of the path; discarding all paths entering a state except for the path with the highest likelihood metric entering the state; and determining the most likely radio frequency phase trajectory based on the paths not discarded.

35 The present invention still further provides a receiver for receiving a direct sequence spread spectrum signal, said receiver comprising: an antenna for receiving

the direct sequence spread spectrum signal; a downconverter for downconverting the received signal, producing a downconverted signal; an analog to digital converter to convert the downconverted signal to a digital signal; a despreader for despreading and coherently correlating the digital signal to a known signal, creating a despread  
5 signal; and a processor for applying a Viterbi algorithm to the despread signal.

#### **Brief Description of the Drawings**

Preferred embodiments of the present invention will now be described in greater detail and will be better understood when read in conjunction with the  
10 following drawings in which:

Figure 1 is a schematic diagram of the receiver of the present invention;

Figure 2 is an example trellis diagram for use with the method of the present invention;

Figure 3 is an alternative trellis diagram for use with the method of the  
15 present invention;

Figure 4 is a graph illustrating an approximation of the probability distribution function of a phase sample as a periodic gaussian pulse on top of a constant function; and

Figure 5 is a graph illustrating the losses in decibels verses the signal to noise  
20 ratio of the samples received in decibels.

#### **Detailed Description of the Drawings**

In this disclosure, a system and method are described that provide a practical way of performing an optimal correlation of the DS-SS GPS signal using the known  
25 statistical properties of the signal. In particular, the method makes use of the generally known slew rate limitation of the LO instability and SV doppler.

The main aspect of the method is a Maximum Likelihood Viterbi procedure similar to the processing used in trellis decoding of standard PSK communication signals. Although the method is applied exclusively to GPS signals in the following  
30 disclosure, one skilled in the art will realize that the method is also applicable for precision tracking of CDMA pilot signals for applications of high sensitivity mobile position location.

Reference is now made to Figure 1. The antenna 10 of a receiver 1 receives a direct sequence spread spectrum signal. The signal is then passed through band-  
35 pass filter 20 to isolate the signal. In a preferred embodiment, band-pass filter 20 is centred at 1.574 Ghz, which is the frequency of the GPS C/A L1 carrier.

The output from band-pass filter 20 is then downconverted by multiplying it with the signal from the radio frequency local oscillator 30 in multiplier 40, producing a baseband signal. This baseband signal is then passed through low-pass filter 50 and an analog to digital converter 60 to create a spread spectrum digitized signal.

5 The spread spectrum digitized signal is then passed through a digital signal processor 70. Digital signal processor 70 is comprised of a despreader 80 and a processor 90. Despreader 80 is comprised of multiplier 84 and signal generator 83 which generates coarse acquisition LI signal 82 which is multiplied with the spread spectrum digitized signal.

10 In a perfect system, the output from despreader 80 would be a DC signal. However, due to frequency and phase instabilities in local oscillator 30, and due to uncertainty of the GPS SV doppler, the phase trajectory is generally a time varying phasor. The output of despreader 80 is thus processed by processor 90, which applies a Viterbi algorithm as described below.

15 Consider the total GPS signal measurement time epoch, denoted by  $T_{\text{tot}}$  as being divided into  $K$  equal length segments of  $T_c$  each. It is assumed that the GPS correlator will coherently integrate for each of the segment lengths  $T_c$  resulting in  $K$  correlation samples  $X=[x_1, x_2, \dots, x_K]^T$ . It is also assumed that  $T_c$  is short enough such that uncertainties in GPS doppler, RF LO offset or frequency/phase instabilities of the RFLO are such that the resulting signal loss in the coherent correlation output samples in  $X$  is not significant. Typically  $T_c$  will be somewhere between 1 to 10 msec.

20  $X=[x_1, x_2, \dots, x_K]^T$  is mapped into corresponding sample phases denoted by  $P=[p_1, p_2, \dots, p_K]^T$ . These phases will be uniformly distributed between 0 and 360°. In order to implement a practical Viterbi algorithm, discrete phases are defined as being uniformly spaced such that:

$M$  = number of discrete phases

$s_0, s_1, \dots, s_{M-1}$  are the discrete phase states given by  $s_n = (n/M) 360^\circ$

Let  $k$  denote the  $k^{\text{th}}$  state interval corresponding to the  $k^{\text{th}}$  sample time or  $x_k$ .

30 Reference is now made to Figure 2, which shows an example trellis diagram for better illustration of the following description.

Consider the  $m^{\text{th}}$  state of the  $k^{\text{th}}$  interval. If there are no phase dynamics due to the RF LO or doppler, then it will map into state  $m$  of the  $(k+1)^{\text{th}}$  interval with a probability of 1. However, due to the uncertainty in the phase dynamics, the  $m^{\text{th}}$  state can map into state  $(m-1)$ ,  $m$ ,  $(m+1)$  of the  $(k+1)^{\text{th}}$  interval. Clearly, with these trellis

state transition probabilities, the modeled slew rate of the phase dynamics can be accurately limited.

The trellis of Figure 2 is only one example. One skilled in the art will realize that other trellis state transition probabilities are possible, and that a probability trellis  
5 can be created to more accurately model these other probabilities. For example, in Figure 3, a system is illustrated in which the slew rate can be higher but a lower probability is assigned to higher slew rates.

Intuitively such slew rate limiting lattice structures as described above effectively "low pass filter" the phase samples to reduce the influence of noise in  
10 correlation samples X.

The number of phase states, "M", is a function of the phase resolution required. If M is too small then there will be a small demodulation loss due to the discrete phase quantization.

At each update, the standard Viterbi algorithm is used to eliminate the trellis  
15 paths of lower likelihood. (A good description of the Viterbi algorithm is found in "Digital Communications" by J. Proakis, McGraw Hill, 3<sup>rd</sup> edition 1995.) Briefly, at the k<sup>th</sup> update a finite number of paths converge onto each of the M trellis phase states. For example, in the trellis structure of Figure 2, there are three candidate paths and in the trellis structure of Figure 3, there are five such paths. Each of these  
20 paths will have a likelihood metric associated with it. The path selected for each path is the one associated with the highest likelihood. Consequently, at each interval step, P paths converge to each trellis state and subsequently P new path segments are generated, as shown in the above examples for the (k+1)<sup>th</sup> trellis interval.

The measured samples,  $p_k$ , are the phases of the complex correlator outputs  
25  $x_k = x_{ik} + ix_{qk}$  as determined by:

$$p_k = \text{atan}(x_{qk}/x_{ik}).$$

This is an example only as there are a variety of numerical methods of extracting the phase from  $x_k$ . In order to update the likelihood metric for each surviving path at the k<sup>th</sup> trellis interval, an estimate of probability of the received  
30 phase being  $p_k$  conditioned on the phase state and the trellis path corresponding to the particular candidate path being considered is required. As the SNR of the correlator outputs,  $x_k$ , is typically low (usually less than 0 dB), the probability distribution function (PDF) of the phase sample  $p_k$  is not gaussian. Also the phase trajectory is dependent in a complicated statistical way on the candidate trellis path  
35 being considered. Consequently, finding the actual conditional probability is impractical. However, there are several assumptions and approximations that can be



reasonably made that significantly simplify the likelihood probability metric. These are:

1. Model the phase random process as first order Markov
2. Approximate the PDF of  $p_k$  as a periodic gaussian pulse on top of a constant function as illustrated in Figure 4.

Given this approach, the conditional probability metric can be approximated as  $(p_k - S_m)^2$  where  $S_m$  represents the assigned phase of the  $m^{\text{th}}$  state. The influence of the constant portion of  $P(p_k|S_m)$  is irrelevant as it is added to each candidate trellis path and therefore does not result in a path differentiating factor. Practical simulation experience has shown that this simple path likelihood metric is effective even though the approximation to the conditional probability of  $P(p_k|S_m)$  is crude.

Another very important factor is that the differentiating part of the likelihood metric when the above approximation is used becomes independent of the variance of the conditional probability of  $p_k$ . This is a key factor in the robustness and practicality of the method.

#### Example

Below there is provided a simple MatLab simulation to demonstrate the effectiveness of the present method.

In the simulation, an array of 2000 complex samples of  $x_k$  were generated based on the assumption that the signal component was a constant amplitude exponential with a phase increment of 0.03 radians. Random noise was added to the samples of  $x_k$  that was zero mean gaussian to both in-phase and quadrature phase components. The noise components were independent from sample to sample and also the noise in the quadrature and in-phase components were independent of each other. The variance of the noise components was selected to satisfy a given SNR of the correlation samples  $x_n$  for the simulation.

The Viterbi demodulator was implemented as described above and tracked the phase excursion of the correlation samples  $x_k$ . The accuracy of the demodulated phase was compared to the actual phase to determine a signal loss factor that was dependent on phase errors only.

Figure 5 shows a plot of this loss factor as a function of the SNR of the correlation samples. As expected, the loss generally decreases as a function of increased SNR. At very low SNR levels, the phase tracking becomes so erratic that the Viterbi demodulation is not effective.

Figure 5 can be used to determine the number of samples required for a given SNR. Consider the samples at 0 dB SNR. As stated earlier, to satisfy the requirements of adequate detection and false alarm statistics, approximately 11 dB of SNR is required at the output of the overall correlation process. Hence if the

5 samples  $x_k$  of 0 dB SNR are generated after coherent correlation of  $T_c$ , the number of samples required,  $K$ , is given by the formula:

$$10\log(K) \geq (\text{Minimum Correlation Process Output SNR}) - (\text{Coherent Correlation SNR}) + (\text{coherence integration losses in dB})$$

or, using Figure 5,

10  $10\log(K) \geq 11 - (0) + 1 = 12 \text{ dB}.$

Solving this,  $K=16$ .

As indicated, the additional 1 dB added to the right hand side of the above formula is to offset the coherence integration losses represented in Figure 5. Comparing this with the traditional scheme which uses non-coherent summation of

15 the correlator output samples, a minimum of  $K=26$  is required. Hence, for a given GPS hypothesis dwell time, sensitivity can be significantly better with the Viterbi style demodulator as represented in this disclosure.

## 20 Matlab simulation listing

```
% viterbi demodulator for phase excursion
%
25 % number of state transitions
K = 2000;

% number of states
M = 30;
30 % phase angle of each state
state_angle = (2*pi/M) * [0:M-1]';

% model the actual signal phase
35 phi_sig = .03 * [1:K]';

% actual signal
SNRdB = -6;
SNR = 10^(0.1*SNRdB);
40 u = exp(1j*phi_sig);
x = randn(K,1) + 1j*randn(K,1) + sqrt(SNR) * u;
phi_meas = angle(x);

% metric for phase state
45 % at each update there is only one surviving path for each
state
```

```

Mt = zeros(M,1);

% paths, and initiate the k=1 state, equal probability that we
can start from
5 % any state
P = zeros(M,K);
P(:,1) = [1:M]';
Pnew = P;

10 % loop over the overall set of K state transitions
I = ones(M,1);

for k=2:K

15 % determine the path metric of the new segment from state
k-1 to state k
g1 = phi_meas(k) * ones(M,1) - state_angle;
g2 = g1 + 2* $\sigma$ *I;
g3 = g1 - 2 *  $\sigma$ *I;
20 M_new = (min(abs([g1,g2,g3]'))).^2;

% determine the new path for state m
for m=1:M
    if m == 1
25 mm1 = M;
m0 = 1;
mpl = 2;
    elseif m == M
30 mm1 = M-1;
m0 = M;
mpl = 1;
    else
35 mm1 = m-1;
m0 = m;
mpl = m+1;
    end

[g1,i] = min([Mt(mm1),Mt(m0),Mt(mpl)]);
if i == 1
40 Pnew(m,1:k) = [P(mm1,1:k-1),m];
Mt(m) = Mt(mm1) + M_new(m);
    elseif i ==2
Pnew(m,1:k) = [P(m0,1:k-1),m];
Mt(m) = Mt(m0) + M_new(m);
45 else
Pnew(m,1:k) = [P(mpl,1:k-1),m];
Mt(m) = Mt(mpl) + M_new(m);
    end
end
50 P = Pnew;

55 end % end of the K transition periods

```

```

figure(1);plot(P');
hold on;
[gl,i] = min(Mt);
5 plot(P(i,:), 'or');
hold off;

% unwrap P
Puw = zeros(K,1);
10 Puw(1) = P(i,1);
offset = 0;
for k=2:K
    Puw(k) = P(i,k) + offset;
    if Puw(k) - Puw(k-1) > 1
15         offset = offset - M;
        Puw(k) = Puw(k) - M;
    end
    if Puw(k) - Puw(k-1) < -1
20         offset = offset + M;
        Puw(k) = Puw(k) + M;
    end

    if abs(Puw(k) - Puw(k-1)) > 1
25         error('discontinuity in Puw');
    end
end

figure(2);
30 plot(Puw);

figure(3);
plot(P(i,:), 'r');
hold on;
35 plot(mod(phi_sig * M/(2 * D),M), 'g');
hold off;
grid on;

40 % calculate the integration loss
Loss = 20 * log10(abs(u' * exp(1j*state_angle(P(i,:))))/K)

```

45 The above-described embodiments of the present invention are meant to be illustrative of preferred embodiments and are not intended to limit the scope of the present invention. Also, various modifications, which would be readily apparent to one skilled in the art, are intended to be within the scope of the present invention.

50 The only limitations to the scope of the present invention are set forth in the following claims appended hereto.

**Claims****I Claim:**

- 5 1. A method of improving sensitivity in the demodulation of a received signal by a receiver over an arbitrary measurement time epoch, said method comprising the steps of:
- correlating said received signal in a coherent fashion creating a correlation signal; and
- 10 utilizing a Viterbi phase state keying trellis demodulation with a variable resolution of phase states over 0 to 360° to demodulate the radio frequency phase trajectory of said correlation signal throughout the measurement time epoch.
- 15 2. The method of claim 1, wherein said step of utilizing a Viterbi phase state keying trellis demodulation further comprises:
- breaking the measurement time epoch into time intervals; and
- creating a trellis of evenly distributed phase state nodes at each time interval, said creating step comprising:
- 20 defining possible state transitions from each phase state node;
- creating state transition paths between phase state nodes in one time interval and phase state nodes in said one time interval; and
- assigning a transition probability to each state transition path.
- 25 3. The method of claim 2, wherein the possible state transitions and the probability of the paths are assigned to reflect properties of said receiver.
4. The method of claim 3 wherein the step of creating possible state transitions
- 30 for each node is performed based on a known phase slew rate limitation of said receiver.
5. The method of claim 4, wherein the known phase slew rate limitation is
- 35 calculated from the instability of a radio frequency local oscillator in said receiver.

6. The method of claim 1, wherein the received signal is a global positioning system (GPS) coarse/acquisition L1 signal generated by a space vehicle (SV).
7. The method of claim 4, wherein the received signal is a global positioning system (GPS) coarse/acquisition L1 signal generated by a space vehicle (SV).
8. The method of claim 1 wherein the received signal is a code-division multiple access (CDMA) pilot signal.
9. The method of claim 7, wherein the GPS SV creates a doppler shift in the phase trajectory, and the known phase slew rate limitation is calculated from the uncertainty of the GPS SV doppler shift.
10. The method of claim 7, wherein the known phase slew rate limitation is calculated from both the instability of a radio frequency local oscillator in said receiver and the uncertainty of the GPS SV doppler.
11. The method of claim 2, wherein said step of utilizing a Viterbi phase state keying trellis demodulation further comprises:
  - creating a likelihood metric for each trellis path based on a measured phase of the received signal and the probability for the path.
12. The method of claim 11, wherein the likelihood metric is created based on an approximation of a probability distribution function of the phase of said correlation signal.
13. The method of claim 12, wherein the approximation is to model the probability distribution function of the phase as a periodic gaussian pulse on top of a constant function.
14. The method of claim 11, wherein the phase of the despread signal has a random process, and the likelihood metric is created based on an approximation of the random process of the phase of the despread signal.
15. The method of claim 14, wherein the approximation is the modelling of the phase random process as a first order Markov.
16. The method of claim 1, wherein said receiver is a mobile receiver.

17. A method of increasing the sensitivity of a receiver for direct-sequence spread spectrum signals, said method comprising the steps of  
downconverting the direct-sequence spread spectrum signal;  
despreading the downconverted signal creating a despread signal with a radio frequency phase trajectory; and  
applying a Viterbi algorithm to the despread signal to determine the radio frequency phase trajectory, whereby the algorithm:  
defines a number of possible states, each state corresponding with a discrete phase and all the states together creating an even distribution of phases between zero and 360°;  
creates possible state transitions for each state;  
sets the probability of a given state transition occurring;  
defines a trellis with paths based on the possible state transitions at a number of discrete time intervals;  
takes a sample of said despread signal at a number of discrete time intervals;  
creates a likelihood metric for each path based on the phase trajectory of said despread signal at the time interval of the path;  
discards all paths entering a state except for the path with the highest likelihood metric entering the state; and  
determines the most likely radio frequency phase trajectory based on the paths not discarded.
18. The method of claim 17 wherein the direct-sequence spread spectrum signal is a global positioning system (GPS) coarse/acquisition (C/A) LI signal generated by a space vehicle (SV).
19. The method of claim 17 wherein the direct-sequence spread spectrum signal is a code-division multiple access (CDMA) pilot signal
20. The method of claim 17 wherein said receiver is a mobile receiver.
21. The method of claim 17 wherein the step of creating possible state transitions for each state is performed based on a known phase slew rate limitation of said receiver.


22. The method of claim 18 wherein the step of creating possible state transitions for each state is performed based on a known phase slew rate limitation of said receiver.
23. The method of claim 21, wherein the known phase slew rate limitation is calculated from the instability of a radio frequency local oscillator in the receiver.
24. The method of claim 22, wherein the GPS SV creates a doppler shift in the phase trajectory, and the known phase slew rate limitation is calculated from the uncertainty of the GPS SV doppler shift.
25. The method of claim 22, wherein the known phase slew rate limitation is calculated from both the instability of a radio frequency local oscillator in said receiver and the uncertainty of the GPS SV doppler.
26. The method of claim 17, wherein the steps of setting the probability of a given state transition occurring and defining a trellis with paths based on the possible state transitions at each time interval are tailored to a particular receiver.
27. The method of claim 18, wherein the likelihood metric is created based on an approximation of a probability distribution function of the phase of said despread signal.
28. The method of claim 27, wherein the approximation is to model the probability distribution function of the phase as a periodic gaussian pulse on top of a constant function.
29. The method of claim 17, wherein the phase of said despread signal has a random process, and the likelihood metric is created based on an approximation of the random process of the phase of said despread signal.
30. The method of claim 29, wherein said approximation is the modelling of the phase random process as a first order Markov.
31. A receiver for receiving a direct sequence spread spectrum signal, said receiver comprising:



an antenna for receiving the direct sequence spread spectrum signal ;  
a downconverter for downconverting the received signal, producing a downconverted signal;  
an analog to digital converter to convert the downconverted signal to a digital signal;  
a despreader for despreading and coherently correlating the digital signal to a known signal, creating a despread signal; and  
a processor for applying a Viterbi algorithm to the despread signal.

32. The receiver of claim 31, wherein the received signal is a global positioning system coarse/acquisition (C/A) L1 signal generated by a space vehicle (SV).
33. The receiver of claim 31, wherein the received signal is a CDMA pilot signal.
34. The receiver of claim 31, wherein the receiver is a mobile receiver.
35. The receiver of claim 31, wherein the known signal is a GPS C/A L1 signal.
36. The receiver of claim 31, wherein the processor  
breaks the despread signal into time intervals; and  
creates a trellis of evenly distributed phase state nodes at each time interval by:  
defining possible state transitions from each phase state node;  
creating paths between phase states node in one time interval  
and phase state nodes in the time interval; and  
assigning a probability to each path.
37. The receiver of claim 36, wherein the possible state transitions and the probability of the paths are assigned to reflect properties of said receiver.
38. The receiver of claim 37, wherein the possible state transitions for each node are based on a known phase slew rate limitation of said receiver.
39. The receiver of claim 38, wherein the known phase slew rate limitation is calculated from the instability of a radio frequency local oscillator in said receiver.

40. The receiver of claim 32, wherein the GPS SV creates a doppler shift in a phase trajectory of said received signal, and the known phase slew rate limitation is calculated from the uncertainty of said GPS SV doppler shift.
41. The receiver of claim 32, wherein the possible state transitions for each node are based on a known phase slew rate limitation of said receiver.
42. The receiver of claim 41, wherein the known phase slew rate limitation is calculated from both the instability of a radio frequency local oscillator in the receiver and the uncertainty of the GPS SV doppler.
43. The receiver of claim 36, wherein the processor further creates a likelihood metre for each path based on a measured phase of said received signal and the probability for the path.
44. The method of claim 43, wherein the likelihood metre is created based on an approximation of a probability distribution function of the phase of said despread signal.
45. The method of claim 44, wherein said approximation is to model the probability distribution function of the phase as a periodic gaussian pulse on top of a constant function.
46. The method of claim 36, wherein the phase of the despread signal has a random process, and the likelihood metre is created based on an approximation of the random process of the phase of the despread signal.
47. The method of claim 46, wherein said approximation is the modelling of the phase random process as a first order Markov.

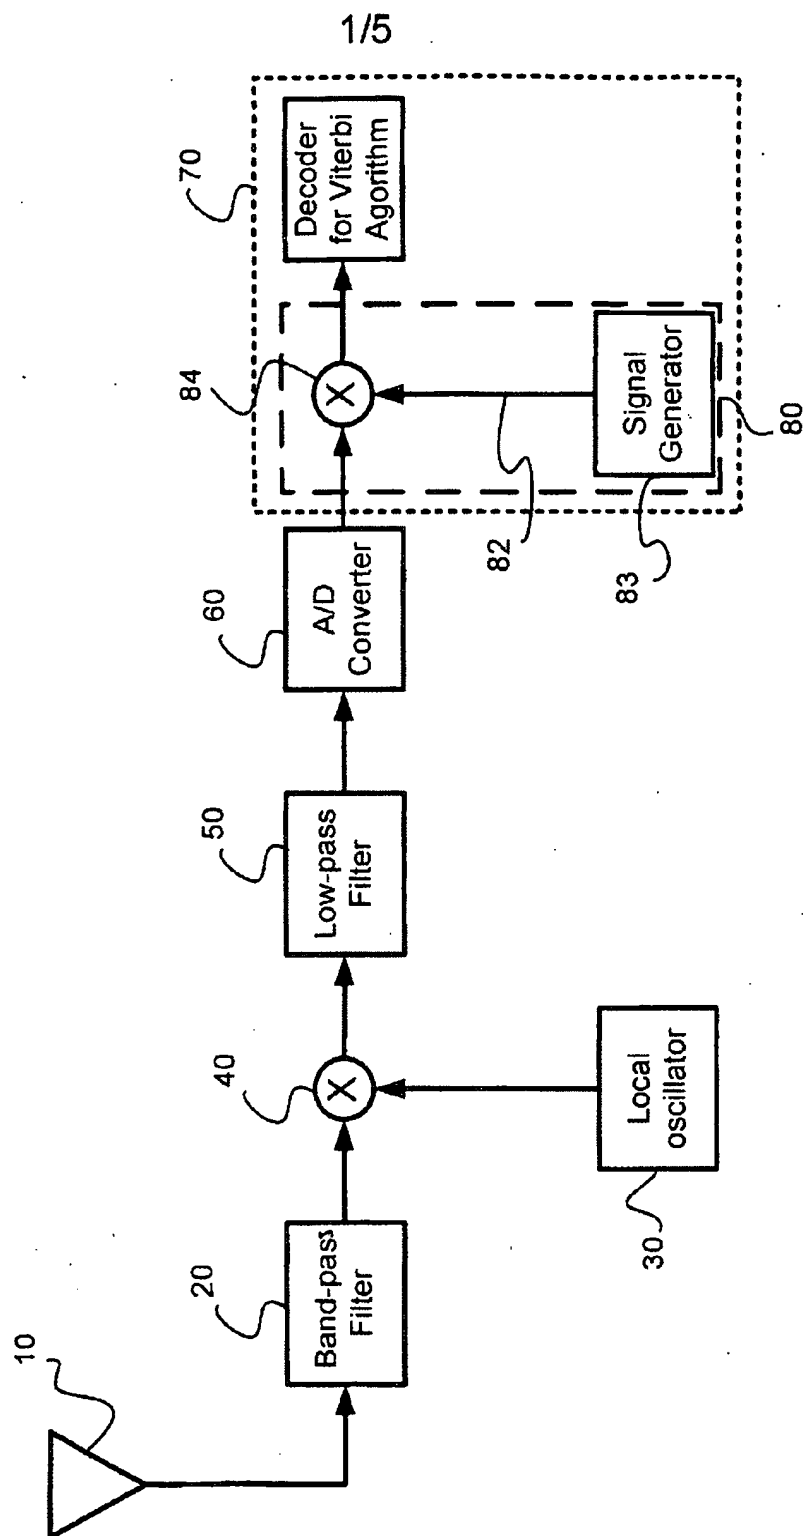

2/5

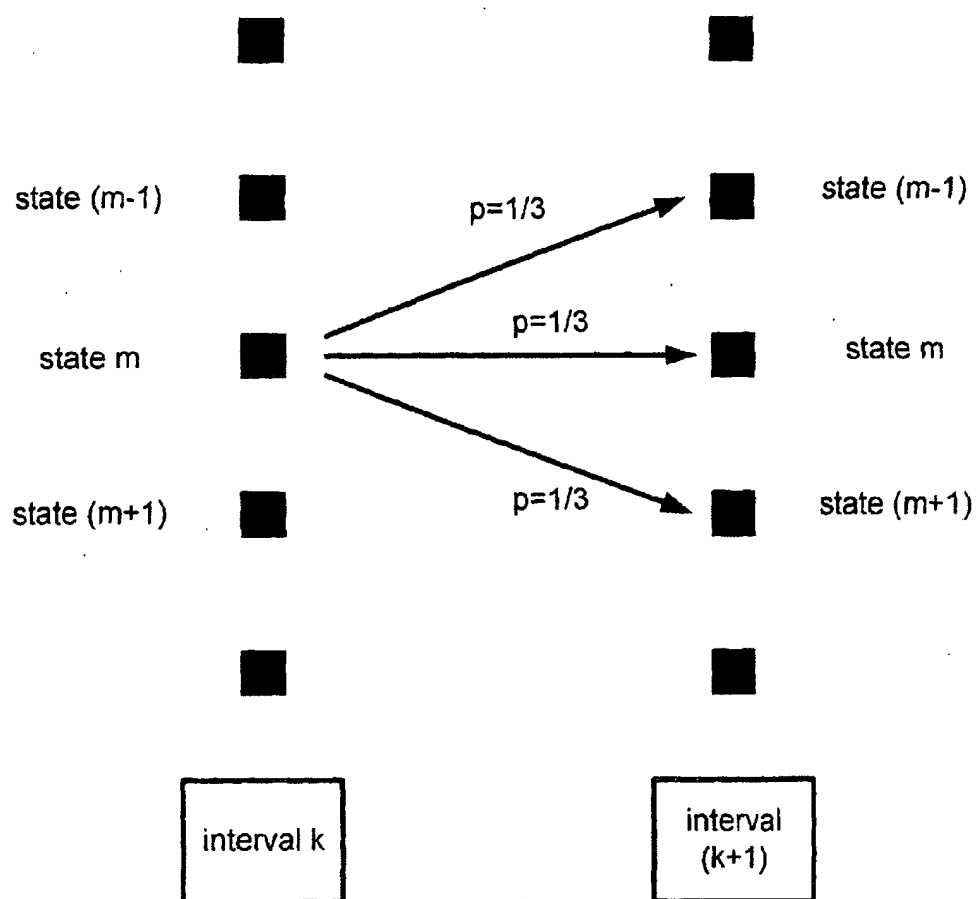


FIG. 2

3/5

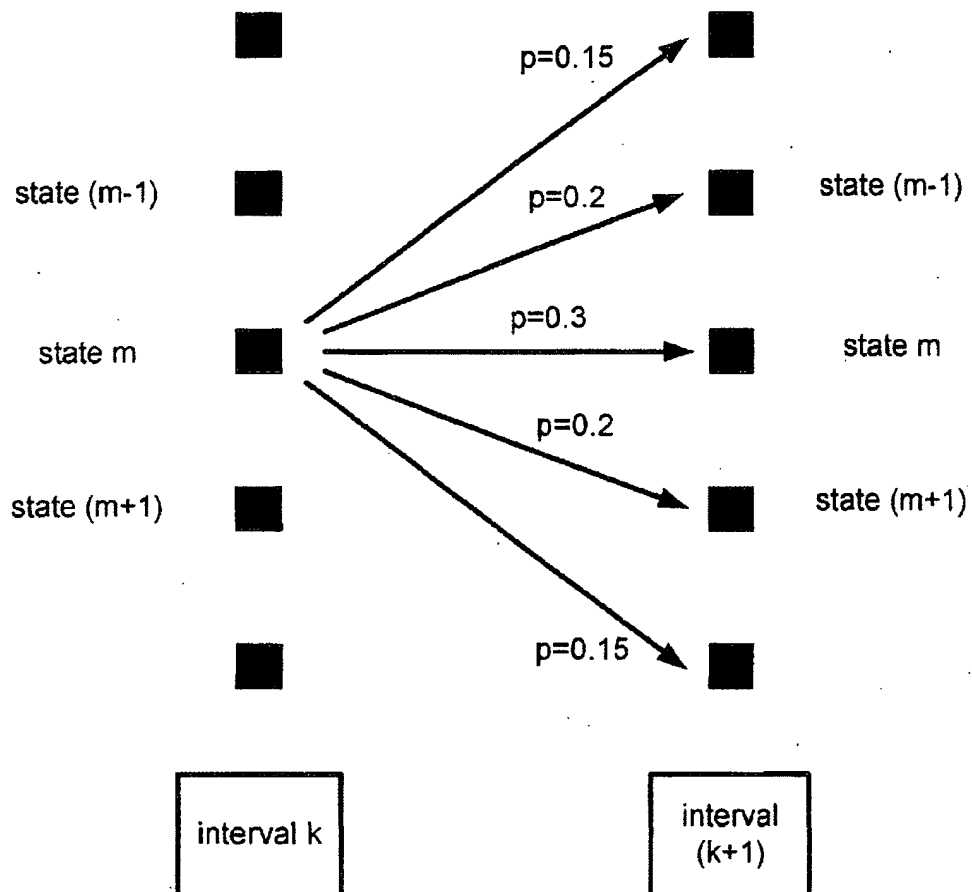


FIG. 3

4/5

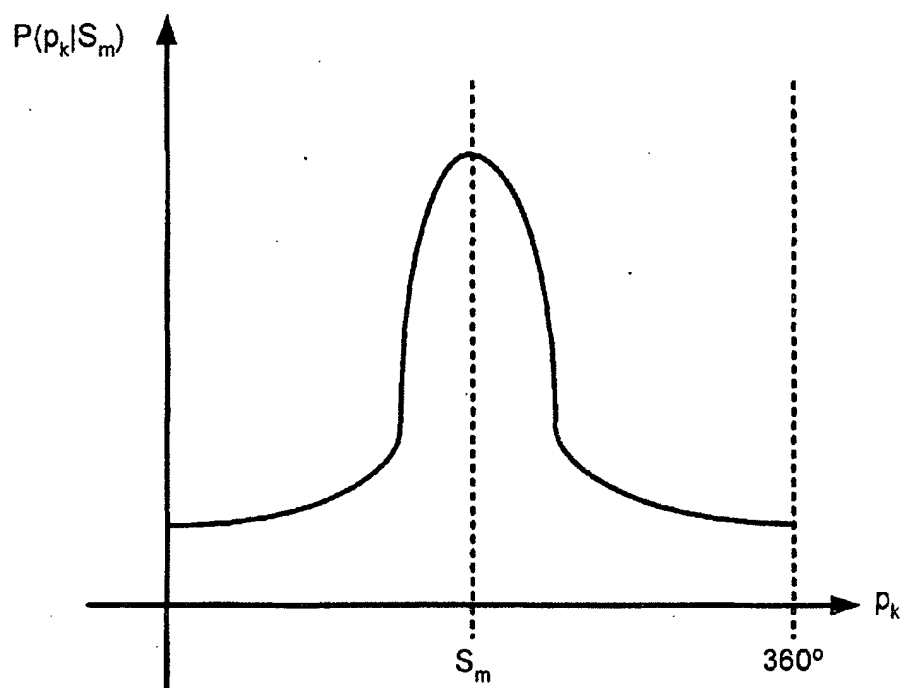


FIG. 4

5/5

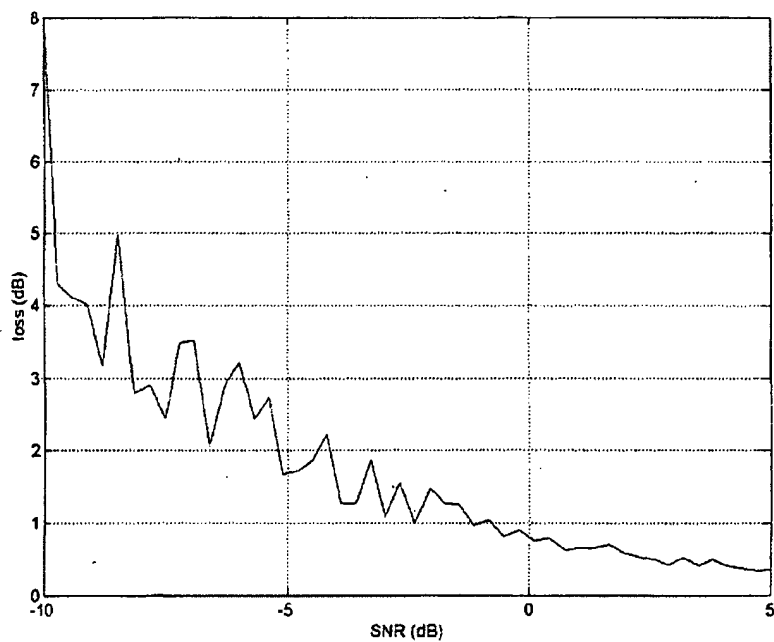


FIG. 5

## INTERNATIONAL SEARCH REPORT

International Classification No.

PCT/CA 02/01843

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L27/233 H04L25/03 G01S5/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 477 208 B1 (HUFF RONALD J) 5 November 2002 (2002-11-05) abstract column 11, line 36 -column 18, line 44 figures 3-6	1-47
A	MUTSUMU SERIZAWA ET AL: "PHASE-TRACKING VITERBI DEMODULATOR" ELECTRONICS & COMMUNICATIONS IN JAPAN, PART I - COMMUNICATIONS, SCRIPTA TECHNICA. NEW YORK, US, vol. 79, no. 1, 1996, pages 82-96, XP000553793 ISSN: 8756-6621 abstract page 89, left-hand column, line 3 -page 91, left-hand column, line 43 figure 3	1,17,31
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

16 July 2003

Date of mailing of the international search report

30/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Marselli, M



# INTERNATIONAL SEARCH REPORT

International Publication No  
PCT/CA 02/01843

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 872 801 A (MOBIN MOHAMMAD SHAFIUL)  16 February 1999 (1999-02-16)  column 5, line 21 -column 6, line 28  figure 1</p> <p>-----</p>	1, 17, 31

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 02/01843

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6477208	B1	05-11-2002	US	5974091 A	26-10-1999
			AU	8660901 A	13-03-2002
			WO	0219646 A2	07-03-2002
			AU	1293099 A	24-05-1999
			BR	9813354 A	22-08-2000
			CA	2308211 A1	14-05-1999
			DE	69803351 D1	28-02-2002
			DE	69803351 T2	14-08-2002
			EP	1130787 A2	05-09-2001
			EP	0913950 A2	06-05-1999
			ES	2170989 T3	16-08-2002
			JP	2001522194 T	13-11-2001
			WO	9923779 A2	14-05-1999
<hr/>					
US 5872801	A	16-02-1999	US	5729558 A	17-03-1998
			EP	0731587 A2	11-09-1996
			JP	8321854 A	03-12-1996
<hr/>					